



Oil burner controls

LMO39...

Microcontroller-based burner controls for the startup, supervision and control of forced draft oil burners in intermittent operation. Maximum oil throughput up to 30 kg/h, also above 30 kg/h on some versions.

The LMO39... and this Data Sheet are intended for use by OEMs which integrate the burner controls in their products.

Use, features

Use	<p>LMO are used for the startup and supervision of 1- or 2-stage oil burners in intermittent operation. Yellow-burning flames are supervised with photo resistive detectors QRB, blue-burning flames with blue-flame detectors QRC.</p> <ul style="list-style-type: none"> • Applications in accordance with EN 267: Gas burners for liquid fuels • Type-tested and approved in accordance with DIN EN 298
Features	<ul style="list-style-type: none"> • Undervoltage detection • Electrical remote reset facility • Bridging contact for oil preheater • Accurate and reproducible program sequence through digital signal handling • Controlled intermittent operation after 24 hours of continuous operation • Limitation of the number of repetitions • Multicolor indication of fault status and operational status messages • BCI

Notes



Warning!

**The safety, warning and technical notes given in the Basic Documentation on the LMO39... (P7154) apply fully to the present document also!
If not observed, the safety functions are no longer ensured and there will be a risk of electric shock.**

Supplementary documentation

Title	Document no.	Document type
LMO...	Environmental declaration	E7130
LMO39...	Basic Documentation	P7154
ACS410	Software documentation	J7352
OCI400	Data sheet	N7614
QRB1...	Data sheet	N7714
QRC1...	Data sheet	N7716

Standards and certificates



Applied directives:

- Low-voltage directive 2014/35/EC
- Directive for pressure devices 97/23/EC and 2014/68/EC (2016-07-16)
- Electromagnetic compatibility EMC (immunity) *) 2014/30/EC

*) The compliance with EMC emission requirements must be checked after the burner control is installed in equipment

Compliance with the regulations of the applied directives is verified by the adherence to the following standards / regulations:

- Automatic burner control systems for burners and appliances burning gaseous or liquid fuels DIN EN 298
- Automatic electrical controls for household and similar use Part 2-5: Particular requirements for automatic electrical burner control systems DIN EN 60730-2-5

The relevant valid edition of the standards can be found in the declaration of conformity!



Note on DIN EN 60335-2-102

Household and similar electrical appliances - Safety - Part 2-102:

Particular requirements for gas, oil and solid-fuel burning appliances having electrical connections. The electrical connections of the LMO39 and the AGK11 comply with the requirements of EN 60335-2-102.



EAC Conformity mark (Eurasian conformity mark)



ISO 9001:2008
ISO 14001:2004
OHSAS 18001:2007



China RoHS
Hazardous substances table:
<http://www.siemens.com/download?A6V10883536>

Life cycle


Burner controls have a designed lifetime* of 250,000 burner startup cycles which, under normal operating conditions in heating mode, correspond to approx. 10 years of usage (starting from the production date given on the type field). This lifetime is based on the endurance tests specified in standard EN 298.

A summary of the conditions has been published by the European Control Manufacturers Association (Afecon) (www.afecor.org).

The designed lifetime is based on use of the burner controls according to the manufacturer's Data Sheet and Basic Documentation. After reaching the designed lifetime in terms of the number of burner startup cycles, or the respective time of usage, the burner control is to be replaced by authorized personnel.

* The designed lifetime is not the warranty time specified in the Terms of Delivery

System overview

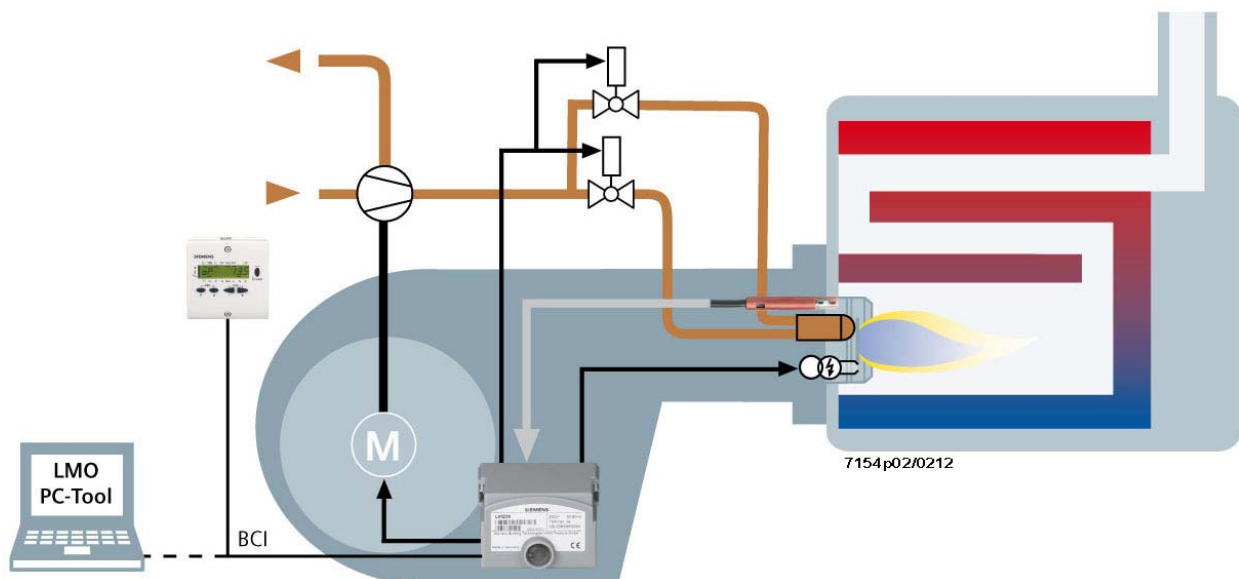

Example: 1-/2-stage oil burner

The diagram shows the full scope of functions of the LMO39... system. The actual functions are to be determined based on the respective execution/configuration.

Type summary (other types of burner controls on request)

The product nos. given below applies to the LMO39... burner control without plug-in base and without flame detector. For ordering information on plug-in bases and other accessories, see Ordering.

Order number	Type		Times in seconds							
			tw max. s	TSA (P267) max. s	t1 (P265) min. s	t3 (P266) min. s	t3n (P295) approx. s	t4 (P270) approx. s	t8 (P274) min. s	tow (P296) approx. s
BPZ:LMO39.100C1	LMO39.100C1	Requirement	2.5	5	0	30	4.5	5	0	600
BPZ:LMO39.100C2	LMO39.100C2	Requirement	2.5	5	0	30	4.5	5	0	600
		Setting range	Min.	0	0	0 + 5.6	0	0	0	0
			Max.	14.994	1237	1237 + 5.6	14.994	1237	1237	1237
			Increment (s)	0.147	4.851	4.851	0.147	4.851	4.851	4.851
			Factory setting	4.557	0	29.106 + 5.6	4.410	4.851	0	596.673

Function parameter	Parameter number	Factory setting
Repetition limit value loss of flame 0 = none 1 = none 2 = 1 x repetition 3 = 2 x repetition 4 = 3 x repetition	280	1

Note on parameterization:

Use the AZL2... or ACS410 to always set the exact value of the required time (multiples of increments of 0.147 seconds, 0.294 seconds or 4.851 seconds).
When parameterizing minimum or maximum times, the possibility of a $\pm 7\%$ tolerance must be taken into consideration.

For **minimum** values: The value to be parameterized must be at least 7% **greater**. For **maximum** values: The value to be parameterized must be at least 7% **smaller**.



Example: The preignition time shall be set to 30 seconds
Special case here: The preignition time is made up of parameter 266 and a fixed time of 5.6 seconds that cannot be parameterized.
Calculation: $30 \text{ seconds} + 7\% - 5.6 \text{ seconds} = 32.1 \text{ seconds} - 5.6 \text{ seconds} = 26.5 \text{ seconds}$
Value to be parameterized (parameter 266): Must be equal to or **greater** than the calculated value (e.g. 29.106 seconds)

Example: The safety time shall be set to 5 seconds
Calculation: $5 \text{ seconds} - 7\% = 4.65 \text{ seconds}$
Value to be parameterized (parameter 267): Must be equal to or **smaller** than the calculated value (e.g. 4.557 seconds)

Legend	TSA	Safety time	t3n	Postignition time
	tw	Waiting time	t4	Interval between flame ON and release fuel valve 2
	t1	Prepurge time	t8	Postpurge time
	t3	Preignition time		
	1)	Repetition (maximum number of startups per controlled start)		

Accessories (to be ordered separately)

**Connection accessories
for small burner controls**

Plug-in base **AGK11.6**
For connection of LMO39... to burner system, grey
Refer to Data Sheet N7201.



Cable holder **AGK66...**
For plug-in base AGK11...
Refer to Data Sheet N7201.



Cable holder **AGK65...**
For plug-in base AGK11...
Refer to Data Sheet N7201.



Flame detectors

Photo resistive detector **QRB**
See Data Sheet N7714



Blue-flame detector **QRC...**
See Data Sheet N7716.









Frontal illumination:



Lateral illumination:



Accessories (to be ordered separately) (continued)

Service tools	<p>Optical interface OCI400...</p> <ul style="list-style-type: none">• Optical interface between burner control and P• Facilitates viewing, handling and recording setting parameters on site with the help of the ACS410 software package <p>Refer to Data Sheet N7614.</p>	
	<p>BC interface module OCI410</p> <ul style="list-style-type: none">• BC interface module between burner control and PC• Facilitates viewing, handling and recording setting parameters on site with the help of the ACS410 software package <p>Refer to Data Sheet N7616.</p>	
	<p>PC software ACS410</p> <p>For parameterization and visualization to burner controls.</p> <p>Refer to software documentation J7352.</p>	
Display and operating units	<p>Display and operating unit AZL21.00A9</p> <p>detached, choice of mounting methods, 8-digit LCD, 5 buttons, BCI for LMO39, degree of protection IP40</p> <p>See Data Sheet N7542</p>	
	<p>Display and operating unit AZL23.00A9</p> <p>detached, choice of mounting methods, 8-digit LCD, 5 buttons, BCI for LMO39, degree of protection IP54</p> <p>See Data Sheet N7542</p>	
Others	<p>Extension of lockout reset button AGK20</p>	
	<p>Signal cable AGV50.100</p> <p>For AZL2..., with RJ11 connector, cable length 1 m, pack of 10</p>	
	<p>PTC resistor AGK25</p> <ul style="list-style-type: none">• AC 230 V• As a burden for terminal 3 (for burners without fan motor, such as atmospheric gas burners)	

Technical data

General unit data

Mains voltage	
- LMO39.100x1	AC 120 V
- LMO39.100x2	AC 230 V
Mains frequency	50...60 Hz
External primary fuse (Si)	T6.3H250V to IEC 60127-2
Power consumption	12 VA
Perm. mounting position	Optional
Input current at terminal 1	Max. 5 A
Weight	Approx. 160 g
Safety class	I (burner control with plug-in base)
Degree of protection	IP40 (to be ensured through mounting) (if RJ11 jack is not covered, only IP10)
Perm. cable length terminal 1	Max. 1 m at a line capacitance of 100 pF/m (max. 3 m at 15 pF/m)
Perm. cable lengths	Max. 3 m at a line capacitance of 100 pF/m
Remote reset	Max. 20 m at 100 pF/m (laid separately)
Detector cable	Max. 10 m at 100 pF/m (laid separately)
Control thermostat/pressurestat	Max. 20 m at 100 pF/m (laid separately)
Limit thermostat/pressure switch	Max. 20 m at 100 pF/m (laid separately)
Alarm terminal 10	Max. 20 m at 100 pF/m (laid separately)
Possible input current terminals 7 and 9	1 mA

Perm terminal load	At $\cos\phi \geq 0.6$
- Terminal 1	Max. 5 A
- Terminals 3 and 8	Max 3 A (15 A during max. 0.5 s)
- Terminals 4, 5 and 10	Max. 1 A
- Terminal 6	Max. 2 A

Signal cable AGV50... Display → BCI

Signal cable	Color white Unshielded Conductor 4 x 0.141 mm ² with RJ11-connector
Cable length AGV50.100	1 m
Supplier	Reference: Hütter http://www.hkt-netzwerktechnik.at/index.htm Order number: on request
Location	Under the burner hood (extra measures required for compliance with SKII EN 60730-1)

Technical data (cont'd)

Environmental conditions	Storage	DIN EN 60721-3-1
	Climatic conditions	Class 1K3
	Mechanical conditions	Class 1M2
	Temperature range	-20...+70 °C
	Humidity	<95% r.h.
	Transport	DIN EN 60 721-3-2
	Climatic conditions	Class 2K3
	Mechanical conditions	Class 2M2
	Temperature range	-20...+70 °C
	Humidity	<95% r.h.
	Operation	DIN EN 60 721-3-3
	Climatic conditions	Class 3K3
	Mechanical conditions	Class 3M3
Temperature range	-20...+60 °C	
Humidity	<95% r.h.	
Installation altitude	Max. 2,000 m above sea level	



Warning!

Condensation, formation of ice and ingress of water are not permitted!
If this is not observed, there is a risk of loss of safety functions and a risk of electric shock.

Flame supervision with QRB... or QRC...

	Detector current required (with flame)	Perm. detector current (without flame)	Possible detector current with flame (typically)
QRB...¹⁾	Min. 45 µA	Max. 5,5 µA	100 µA
QRC...¹⁾	Min. 45 µA	Max. 5,5 µA	70 µA


- ¹⁾ The values given in the table above only apply under the following conditions:
 - Mains voltage depending on execution AC 120 V or AC 230 V
 - Ambient temperature 23 °C

Green signal lamp (LED) for indication of operating state

	Detector current in operation: - Flame signal instable - Green signal lamp (LED) flashing	Detector current in operation: - Flame signal stable - Green signal lamp (LED) steady on
QRB...¹⁾	<45 µA	>45 µA
QRC...¹⁾	<45 µA	>45 µA


- ¹⁾ The values given in the table above only apply under the following conditions:
 - Mains voltage depending on execution AC 120 V or AC 230 V
 - Ambient temperature 23 °C

Measuring circuit for detector current

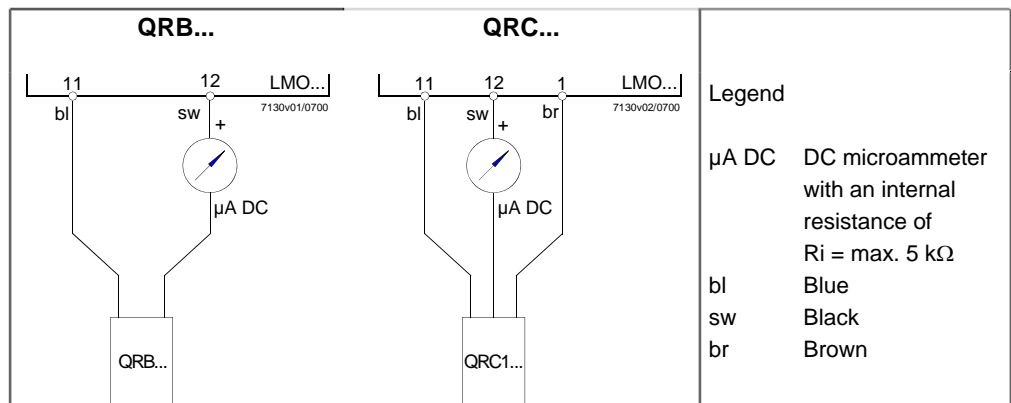

As an alternative to detector current measurement, the interface OCI400 with PC software ACS410 can be used. In that case, the DC microammeter is not required.


Inputs and outputs/internal connection diagram LMO39.100...

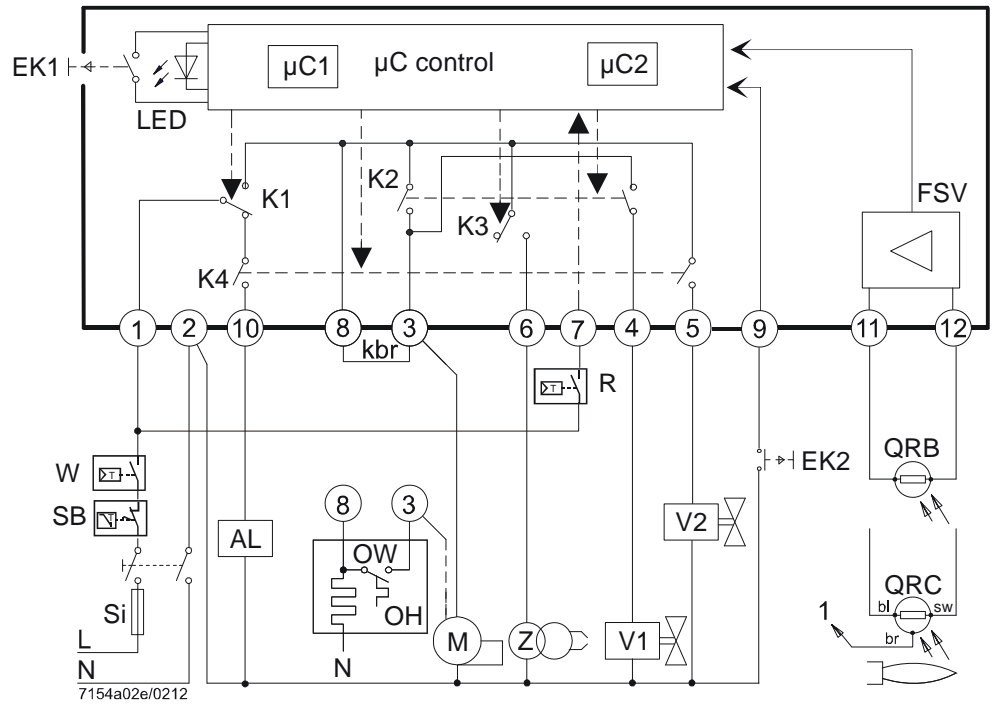

Legend

AL	Error message (alarm)
BCI	Communication interface
EK	Lockout reset button (internal)
EK2	Remote lockout reset button
FS	Flame signal
FSV	Flame signal amplifier
K1...4	Internal relay
kbr	Jumper
M	Fan motor
OH	Oil preheater
OW	Release contact of oil preheater
QRB...	Photo resistive detector
QRC...	Blue flame detector (bl = blue, br = brown, sw = black)
R	Control thermostat/pressurestat
SB	Safety limiter
Si	External pre-fuse
V...	Fuel valve
W	Limit thermostat/pressure switch
Z	Ignition transformer

Control sequence LMO39.100...

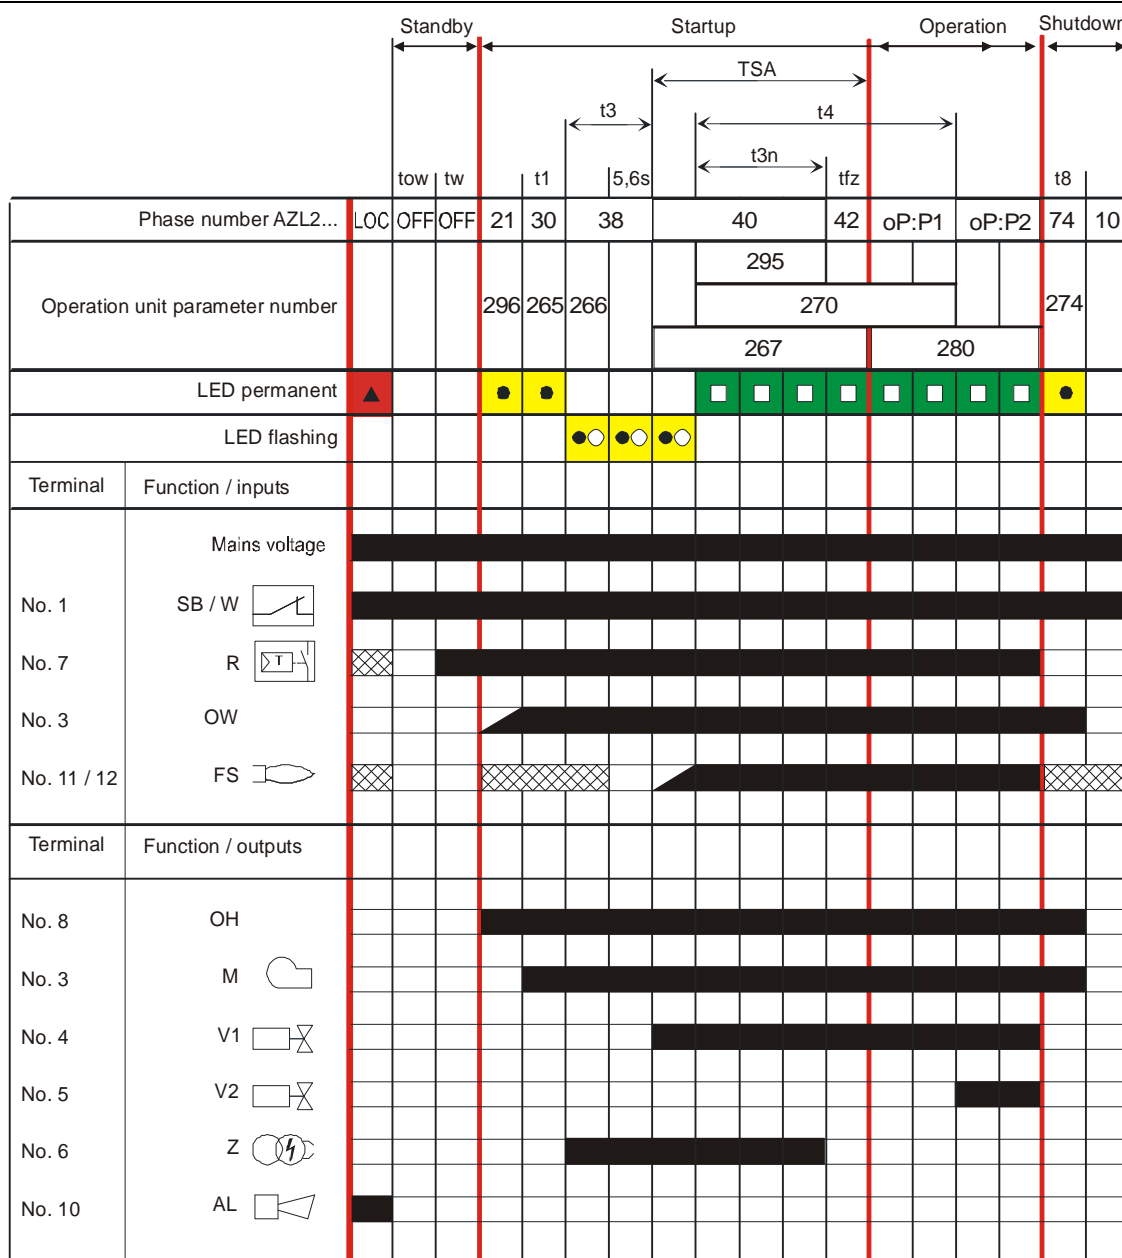

7154d01e/0312

Legend

- | | | | |
|-----|-----------------------------------------------------------------------|-----|-----------------------------------------------|
| t1 | Prepurge time (parameter 265) | t8 | Postpurge time (parameter 274) |
| t3 | Preignition time (parameter 266 + 5.6 seconds) | TSA | Ignition safety time (parameter 267) |
| t3n | Postignition time (parameter 295) | tw | Waiting time |
| t4 | Interval between flame ON and release of fuel valve 2 (parameter 270) | tow | Oil pressure switch - timeout (parameter 296) |
-
- | | | | |
|----|----------------------------------|------|----------------------------------|
| AL | Error message (alarm) | R | Control thermostat/pressurestat |
| FS | Flame signal | SB | Safety limiter |
| M | Fan motor | V... | Fuel valve |
| OH | Oil preheater | W | Limit thermostat/pressure switch |
| OW | Release contact of oil preheater | Z | Ignition transformer |
-
- | | |
|--|--------------------------------------------|
| | Input signal/output signal 1 (ON) |
| | Input signal/output signal 0 (OFF) |
| | Input permissible signal 1 (ON) or 0 (OFF) |




Dimensions

Dimensions in mm

LMO39...





Plug-in base AGK11.6

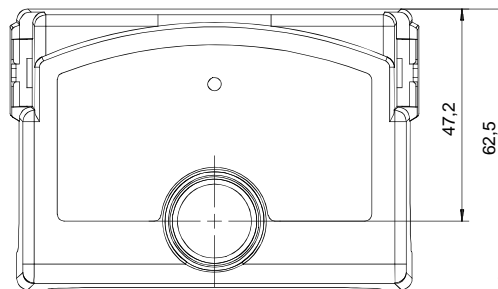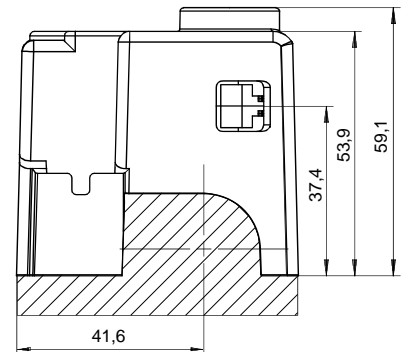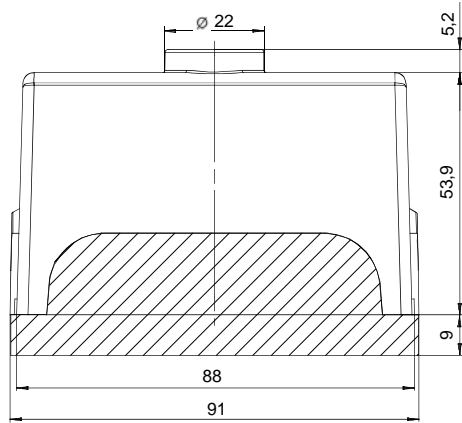


7106m01/0405

LMO39... with lockout reset
button extension AGK20...

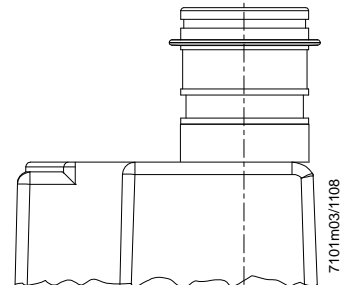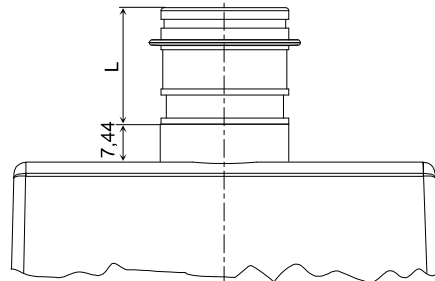

7101m03/1108

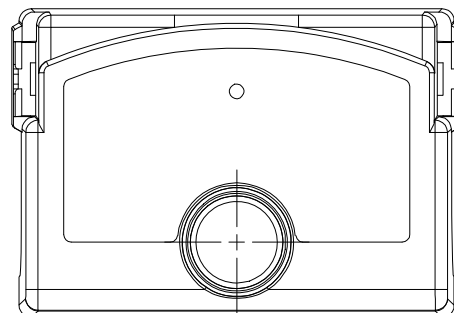

Designation	Length (L) in mm
AGK20.19	19
AGK20.43	43
AGK20.55	55